



**minipack®**  
THE ORIGINAL PIONEER

# MVS45 X

TABLETOP VACUUM - SEALING BAR 450 MM



## DESCRIPTION

The **chamber vacuum sealers MVS X** line has high-quality technological and functional content, but retains the utmost ease of use.

The collaboration with important chefs at the stage of realization and design has allowed to enrich the functions offered by these latter-generation **vacuum machines**, taking into consideration the specific needs of professional users.

The tactile control keypad is adhesive and glued on the front of the bodywork to prevent the entry of liquids into the card. The control panel allows you to set up to 10 customized programs, making these **chamber vacuum sealers** very versatile products.

The display shows the need for oil change. The electronic sensor interprets the data directly from the card and reads the degree of vacuum realized inside the chamber. Finally, you can also calibrate the machine to correct any variations in atmospheric pressure at different altitudes.

**minipack®-torre S.p.A.**

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy


P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151

## TECHNICAL FEATURES

	MVS45 X Front Bar	MVS45 X 2 Side Bars
Electrical power supply	120V 60Hz 1Ph 230V 50/60Hz 1Ph	120V 60Hz 1Ph 230V 50/60Hz 1Ph
MAX power installed	1,4 kW (120V) 1,1 kW (230V)	2,0 Kw (120V) 2,0 Kw (230V)
Maximum current	13 A (120V) 6 A (230V)	17 A (120V) 9 A (230V)
Dimensions of the sealing bars	450 mm	450 mm
Packaging cycle (Vacuum 99,9%)	Vacuum= 24 s Air re-immission= 8 s	Vacuum= 24 s Air re-immission= 8 s
Vacuum pump	20 mc	20 mc
Machine dimensions (lid open)	544x649x750 mm	544x649x750 mm
Machine dimensions (lid closed)	544x649x490 mm	544x649x490 mm
Machine weight (Net/Gross)	78/87 kg	78/87 kg
Available chamber dimensions (Tank+Lid)	466x405,5x226 mm	351x466x226 mm

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

## TECHNICAL DRAWING

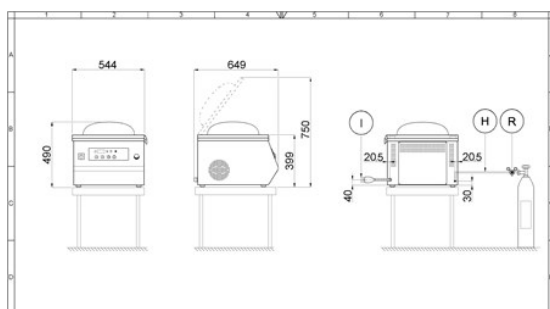


**minipack®-torre S.p.A.**

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151



**minipack®**  
THE ORIGINAL PIONEER



## TECHNICAL FEATURES

---

- Stainless steel (AISI 304)
- Vacuum cycle with stop
- Bag scrap cutting device
- Quick-coupling aluminium sealing bar
- Clear plastic lid suitable for use with food
- Volumetric vacuum sensor
- PE-HD filling tables
- 10 customisable programs
- Self-calibration
- Sealing bar overload safety device
- Oil and assistance warning light
- CE/ETL/NSF certification.

## VERSIONS

---

**MVS 45 X FRONT B.** (MVS 45 X front bar)

**MVS 45 X 2 SIDE B.** (MVS 45 X 2 side bars)

**minipack®-torre S.p.A.**

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151